


METRIC FEMALE - 60 DEG CONE - 12610

AVAILABLE TO ORDER



Code	Tube		Thread T	Dimensions		Pressure	
	Hose Diameter Inch	mm		H	A	Bar	psi
12610-03-10	3/16"	4.8	M10 x 1	15	18	350	5076
12610-03-12	3/16"	4.8	M12 x 1.5	17	18	350	5076
12610-04-10	1/4"	6.4	M10 x 1	15	18	350	5076
12610-04-12	1/4"	6.4	M12 x 1.5	17	18	350	5076
12610-04-14	1/4"	6.4	M14 x 1.5	19	18	350	5076
12610-04-16	1/4"	6.4	M16 x 1.5	22	19	350	5076
12610-04-18	1/4"	6.4	M18 x 1.5	22	19	350	5076
12610-05-14	5/16"	7.9	M14 x 1.5	19	18	350	5076
12610-05-16	5/16"	7.9	M16 x 1.5	22	19	350	5076
12610-05-18	5/16"	7.9	M18 x 1.5	22	19	350	5076
12610-06-14	3/8"	9.5	M14 x 1.5	19	19	350	5076
12610-06-16	3/8"	9.5	M16 x 1.5	22	20	350	5076
12610-06-18	3/8"	9.5	M18 x 1.5	22	20	350	5076
12610-06-20	3/8"	9.5	M20 x 1.5	27	21	315	4568
12610-06-22	3/8"	9.5	M22 x 1.5	27	21	315	4568
12610-08-18	1/2"	12.8	M18 x 1.5	24	20	315	4568
12610-08-20	1/2"	12.8	M20 x 1.5	27	22	315	4568
12610-08-22	1/2"	12.8	M22 x 1.5	27	22	315	4568
12610-08-24	1/2"	12.8	M24 x 1.5	30	23	250	3626
12610-08-26	1/2"	12.8	M26 x 1.5	32	24	250	3626
12610-10-26	5/8"	16	M26 x 1.5	32	24	250	3626
12610-10-27	5/8"	16	M27 x 1.5	32	24	250	3626
12410-12-26	3/4"	19	M26 x 1.5	32	25	315	4568
12410-12-27	3/4"	19	M27 x 1.5	32	25	250	3626
12610-12-30	3/4"	19	M30 x 1.5	36	26	200	2901
12610-16-38	1"	25.4	M38 x 1.5	46	37	125	1813
12610-24-48	1-1/4"	31.8	M45 x 1.5	50	32	125	1813

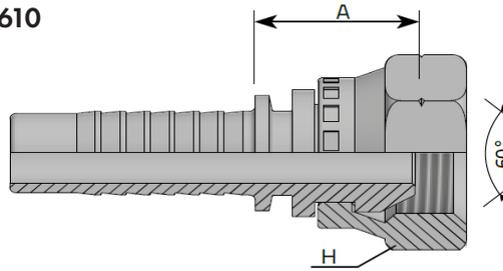