


METRIC FEMALE 24 DEG CONE - 90 DEG ELBOW - L TYPE - 12290

AVAILABLE TO ORDER



Code	Tube		Thread		Dimensions			Pressure	
	Hose Diameter		T	D	H	B	A	Bar	psi
	Inch	mm	mm	mm	mm	mm	mm		
12290-03-12	3/16"	4.8	M12 x 1.5	6	14	31.5	29.5	250	3626
12290-03-14	3/16"	4.8	M14 x 1.5	8	17	31.5	29.5	250	3626
12290-04-12	1/4"	6.4	M12 x 1.5	6	17	31.5	29.5	250	3626
12290-04-14	1/4"	6.4	M14 x 1.5	8	17	31.5	29.5	250	3626
12290-04-16	1/4"	6.4	M16 x 1.5	10	19	32.5	29	250	3626
12290-04-18	1/4"	6.4	M18 x 1.5	12	22	30.5	27	250	3626
12290-05-14	5/16"	7.9	M14 x 1.5	8	19	36.7	31.5	250	3626
12290-05-16	5/16"	7.9	M16 x 1.5	10	19	32.5	31	250	3626
12290-05-18	5/16"	7.9	M18 x 1.5	12	22	37	29	250	3626
12290-06-16	3/8"	9.5	M16 x 1.5	10	19	38	33	250	3626
12290-06-18	3/8"	9.5	M18 x 1.5	12	22	37.5	35.5	250	3626
12290-06-22	3/8"	9.5	M22 x 1.5	15	27	42	34	250	3626
12290-08-18	1/2"	12.8	M18 x 1.5	12	22	49	39	250	3626
12290-08-22	1/2"	12.8	M22 x 1.5	15	27	44	39.5	250	3626
12290-08-26	1/2"	12.8	M26 x 1.5	18	32	46.5	39.5	160	2320
12290-10-26	5/8"	16	M26 x 1.5	18	32	50.5	48.5	160	2320
12290-10-30	5/8"	16	M30 x 2	22	36	53	48.5	160	2320
12290-12-26	3/4"	19	M26 x 1.5	18	32	63.5	53.5	160	2320
12290-12-30	3/4"	19	M30 x 2	22	36	55.5	56.5	160	2320
12290-16-36	1"	25.4	M36 x 3	28	41	72.5	73	100	1450
12290-20-45	1-1/4"	31.8	M45 x 2	35	50	86.5	92	100	1450
12290-24-52	1-1/2"	38.1	M52 x 2	42	60	94	99	100	1450

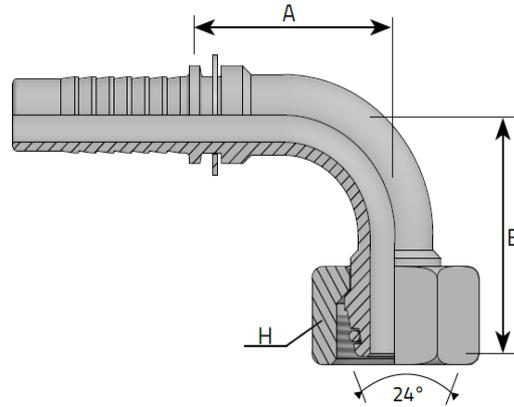